
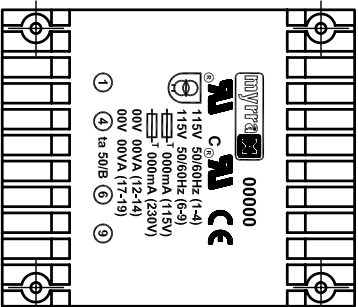
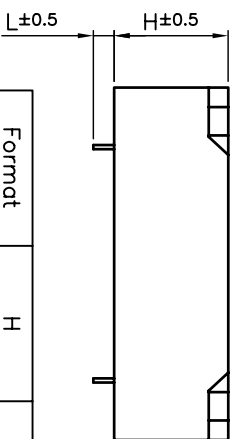

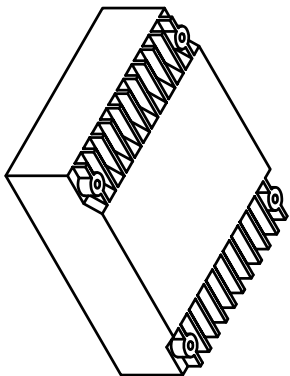


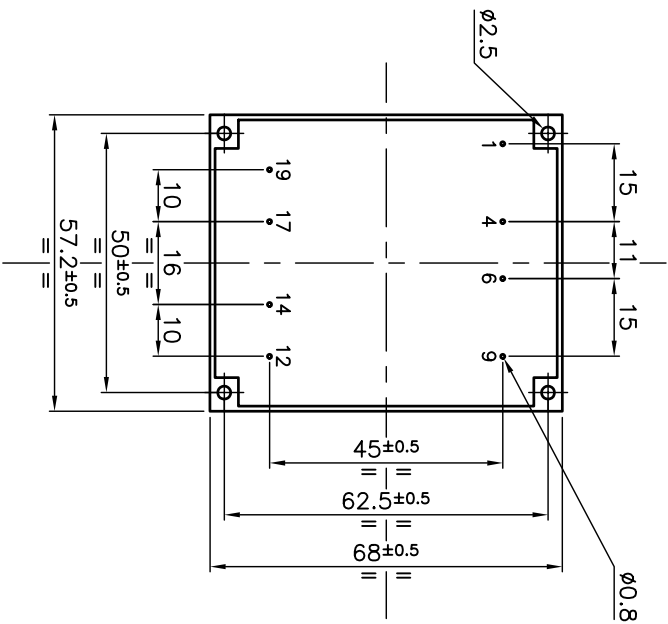

| Ref   | Puissance | Primaire | Fusible | Secondaire | ta   |
|-------|-----------|----------|---------|------------|------|
| 45037 | 10VA      | 115-230V | 125/63  | 2x6V       | 50/B |
| 45038 | 10VA      | 115-230V | 125/63  | 2x9V       | 50/B |
| 45039 | 10VA      | 115-230V | 125/63  | 2x12V      | 50/B |
| 45040 | 10VA      | 115-230V | 125/63  | 2x15V      | 50/B |
| 45041 | 10VA      | 115-230V | 125/63  | 2x18V      | 50/B |
| 45042 | 10VA      | 115-230V | 125/63  | 2x24V      | 50/B |
| 45043 | 14VA      | 115-230V | 160/80  | 2x6V       | 50/B |
| 45044 | 14VA      | 115-230V | 160/80  | 2x9V       | 50/B |
| 45045 | 14VA      | 115-230V | 160/80  | 2x12V      | 50/B |
| 45046 | 14VA      | 115-230V | 160/80  | 2x15V      | 50/B |
| 45047 | 14VA      | 115-230V | 160/80  | 2x18V      | 50/B |
| 45048 | 14VA      | 115-230V | 160/80  | 2x24V      | 50/B |
| 45049 | 18VA      | 115-230V | 200/100 | 2x6V       | 50/B |
| 45050 | 18VA      | 115-230V | 200/100 | 2x9V       | 50/B |
| 45051 | 18VA      | 115-230V | 200/100 | 2x12V      | 50/B |
| 45052 | 18VA      | 115-230V | 200/100 | 2x15V      | 50/B |
| 45053 | 18VA      | 115-230V | 200/100 | 2x18V      | 50/B |
| 45054 | 18VA      | 115-230V | 200/100 | 2x24V      | 50/B |
| 45055 | 24VA      | 115-230V | 250/125 | 2x6V       | 50/B |
| 45056 | 24VA      | 115-230V | 250/125 | 2x9V       | 50/B |
| 45057 | 24VA      | 115-230V | 250/125 | 2x12V      | 50/B |
| 45058 | 24VA      | 115-230V | 250/125 | 2x15V      | 50/B |
| 45059 | 24VA      | 115-230V | 250/125 | 2x18V      | 50/B |
| 45060 | 24VA      | 115-230V | 250/125 | 2x24V      | 50/B |
| 45061 | 30VA      | 115-230V | 315/160 | 2x6V       | 50/B |
| 45062 | 30VA      | 115-230V | 315/160 | 2x9V       | 50/B |
| 45063 | 30VA      | 115-230V | 315/160 | 2x12V      | 50/B |
| 45064 | 30VA      | 115-230V | 315/160 | 2x15V      | 50/B |
| 45065 | 30VA      | 115-230V | 315/160 | 2x18V      | 50/B |
| 45066 | 30VA      | 115-230V | 315/160 | 2x24V      | 50/B |

| Format     | H    | L   |
|------------|------|-----|
| UI 39x8    | 21.7 | 3.7 |
| UI 39x10.2 | 23.8 | 4.1 |
| UI 39x13.5 | 27.1 | 4.1 |
| UI 39x17   | 30.8 | 4   |
| UI 39x21   | 34.8 | 4   |

| Rev | Date | Modification | Dessiné | Visé |
|-----|------|--------------|---------|------|
| A   |      |              |         |      |

|          |          |                       |
|----------|----------|-----------------------|
| Emblème: | Emblème: | Tolérances générales: |
| Emblème: | Emblème: | Emblème:              |
| Emblème: | Emblème: | Emblème:              |

|              |       |       |        |
|--------------|-------|-------|--------|
| Dessiné par: | DATE: | Visé: | J.P.M. |
|--------------|-------|-------|--------|

TRANSFORMATEURS UI 39



22, Allée du clos des chèvres  
Z.A. Les Portes de la Forêt  
77090 COLLEGEN  
Tél: 01.60.37.55.55  
Fax: 01.60.17.12.00

UI 39